



MS190WUBFIX30D1

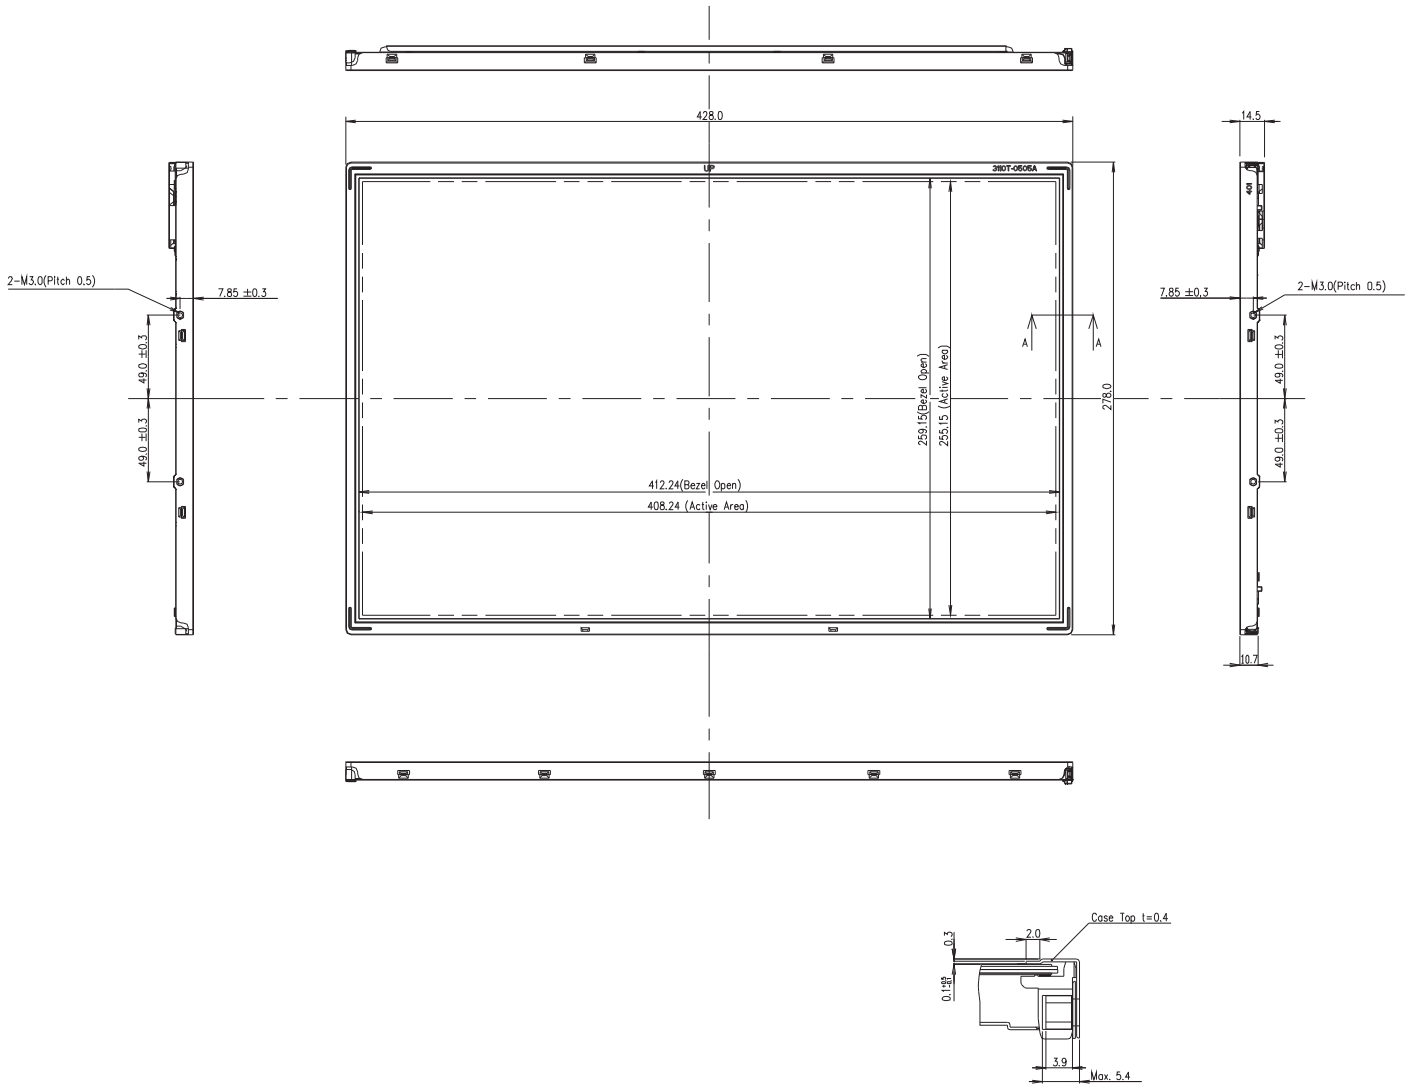


STORE.LCDPARTS.NET

MS190WUBFIX30D1

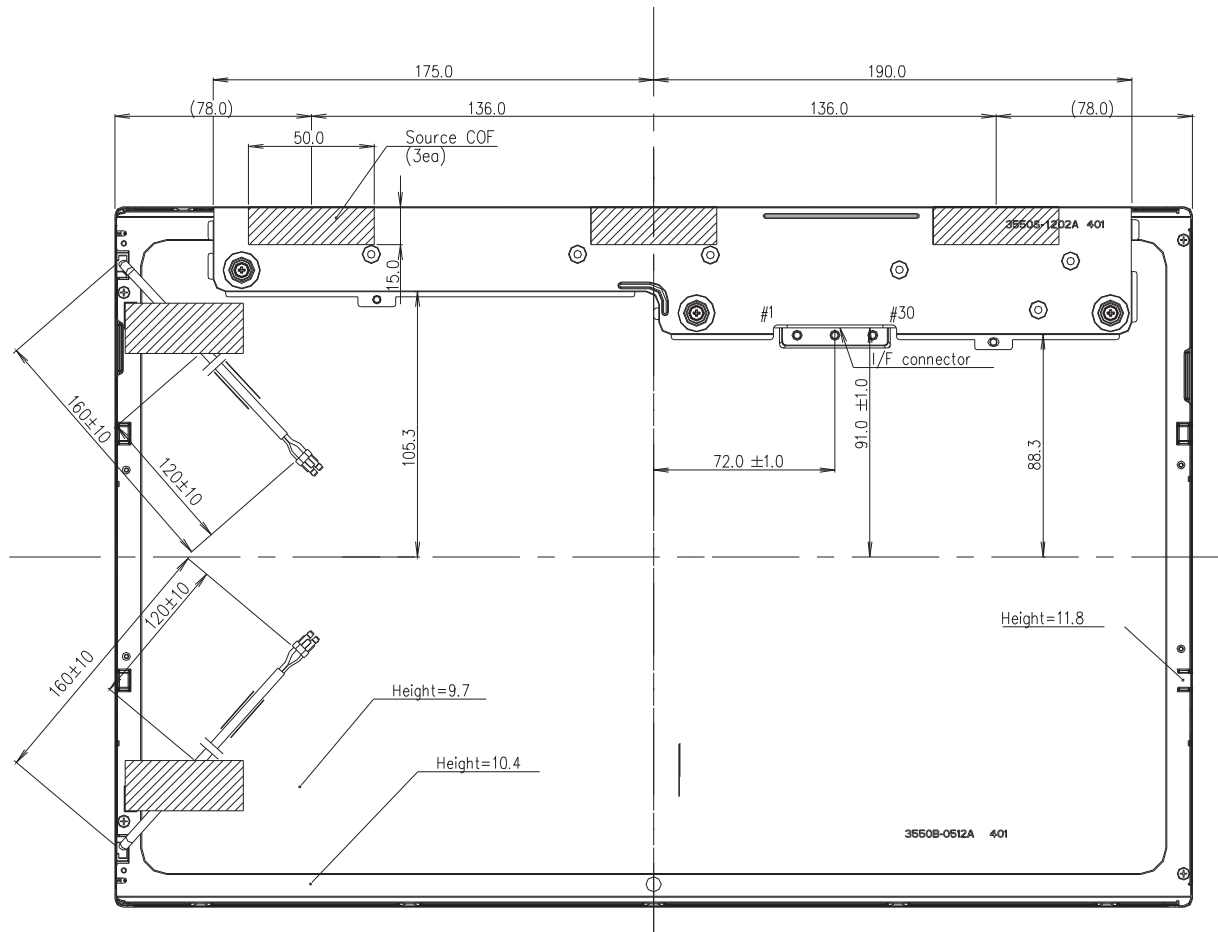

Notes

1. Backlight : 2 Cold Cathode Fluorescent Lamps.
2. I/F Connector Specification : GT103-30S-H23-E2500-D(LSM)
3. Lamp Connector Specification : 35001HS-02LD(Yeonho_2pin)
4. Torque of user hole : 3.0~3.5 kgf-cm
5. Tilt and partial disposition tolerance of display area as following
 - (1) Y-Direction : IA-BI \leq 1.0
 - (2) X-Direction : IC-DI \leq 1.0

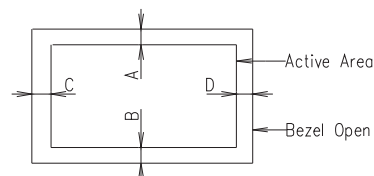

6. Do not wind conductive tape around the backlight wires
7. Unspecified tolerances to be \pm 0.5mm
8. The COF area is weak & sensitive, So, please don't press the COF area.