## SPECIFICATION:

For Jumpers configuration, please visit us online at <a href="http://lcdparts.net/howto/MS610UB.aspx">http://lcdparts.net/howto/MS610UB.aspx</a>

MS610UB V0 Dimension: 80mm (3.15") X 20mm (0.79" X 6.60mm (0.26")

MS610UB is design for 10.4 inch or smaller LCD screen that space is limited. It has an exact pin out as **MS456UB on CN3** connector and **CN1** has an exact pin out as **MS466XB** driver.

## Input connector pin assignments:

## CN1

PIN NO	SYMBOL	DESCRIPTION
1,2	VIN	POWER SUPPLY: 10V to 24V DC
3	ENA	ENABLED & DISABLED CONTROL: 3.0V ON
4	ADJ	BRIGHTNESS CONTROL: OV=MAX.
5,6	GND	POWER SUPPLY GROUND

### CN3

PIN NO	SYMBOL	DESCRIPTION
1,2	VIN	POWER SUPPLY: 10V to 24V DC
6	ENA	ENABLED & DISABLED CONTROL: 3.0V ON
4	ADJ	BRIGHTNESS CONTROL: OV=MAX.
3,5	GND	POWER SUPPLY GROUND


## Output Pin Assignments:

### CN2

PIN NO	SYMBOL	DESCRIPTION
1,2	VOUT	DC VOLTAGE OUTPUT
3,5	GND	LOW VOLTAGE RETURN

#### CN4 and CN5

PIN NO	SYMBOL	DESCRIPTION
1	VOUT	DC VOLTAGE OUTPUT
2	GND	LOW VOLTAGE RETURN

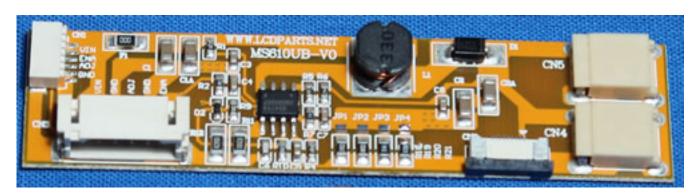

# WWW.LCDPARTS.NET

For Jumpers configuration, please visit us online at <a href="http://lcdparts.net/howto/MS610UB.aspx">http://lcdparts.net/howto/MS610UB.aspx</a>